

Mychef Cook Pro 10GN 1/1



TECHNICAL SPECIFICATIONS

Capacity GN 65 mm	10 x 1/1GN
Distance between GN tracks	68 mm
Meals per day	80-160
Maximum temperature	260 °C
Dimensions (WxDxH)	760x710x1020
Weight	102 kg
Packaging dimensions (WxDxH)	900x830x1380
Gross weight	118 kg
Power	18,6 kW
Voltage	400V/3L+N/50-60
Water	R 3/4"
Drainage	DN 40
Water pressure	150 - 400 kPa

GENERAL SPECIFICATIONS

- LCD control panel
- Regulation of humidity, temperature, time and speed
- Convection cooking from 30°C to 260°C
- Steam mode cooking from 30°C to 130°C
- Mixed mode cooking from 30°C to 260°C
- High thermal inertia camera
- Fan stop when door is opened
- Two fan speeds and reverse rotation
- LED camera illumination
- Low emission double glass hinged door
- Door opening positioner
- MyCare automatic washing system
- Automatic Cooldown for self-cleaning
- GN Guides
- Integrated siphon with outgoing water cooling
- Door and frame rainwater collection system with drainage
- Automatic preheating


OPTIONALS

- Door opening on the left hand side
- Voltage 230V/3L/50-60
- WiFi connection
- MyCloud remote control
- Compatible with Google Home Voice control


ACCESSORIES

- Special trays for each baking
- Washing shower
- Condensation hood
- CleanDuo detergent
- MySmoker
- Support table
- Wall bracket


INSTALLATION DETAILS

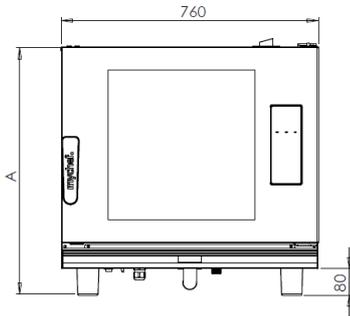

A = 1020 mm

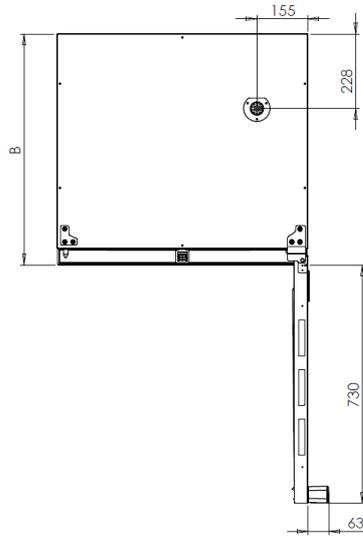

B = 710 mm

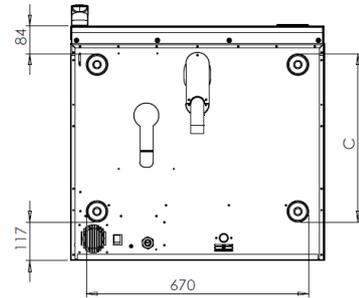

C = 510 mm

SAFETY DISTANCES


Sides = 50 mm

Rear = 100 mm

Upper = 500 mm

Heat sources = 1000 mm

It must be completely level

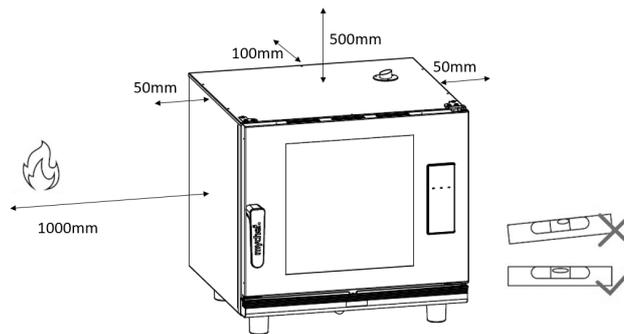


POWER CONNECTION

400/3L+N/50-60

Power (kW)
18,6

Current (A)
24,2

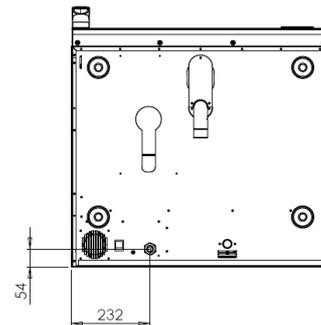

WATER CONNECTION

A Conexión 3/4" agua tratada

B Desagüe DN 40

QUALITY OF WATER

Temperature < 30°C

Pressure 150 to 400 kPa dynamic flow

Hardness between 3° and 6° FH

PH between 6.5 and 8.5

Chlorides below 30 ppm

Use of water softener and filter required

